



NEILPRYDESAILS

INTERNATIONAL DESIGN AND TECHNICAL OFFICE

Sail Trimming Guide for the Beneteau 373

March 2004

© Neil Pryde Sails International
354 Woodmont Road #18
Milford, CT 06460
Phone: 203-874-6984 • Fax: 203-877-7014
Email: admin@neilprydesails.com
Web: www.neilprydesails.com

*All material herein
Copyright 2004-2005 Neil Pryde Sails International
All Rights Reserved*


HEADSAIL OVERVIEW:

The Beneteau Oceanis 373 built in the USA and supplied with Neil Pryde Sails is equipped with a 140% headsail. The following features are built into this headsail:


- The size is optimized to sheet correctly to the factory track when fully deployed *and* when reefed.
- Neil Pryde Multi-Track Foam Luff System™, which allows for smooth and correctly shaped sails when reefed. ([See the Technical brief for details on this system](#))
- Reef ‘buffer’ patches are fitted at both head and tack, which are designed to distribute the loads on the sail when reefed.
- Reefing bands located on the starboard side of the tack buffer patch provide a visual mark for setting up pre-determined reefing locations.
- A telltale ‘window’ at the leading edge of the sail located about 18% of the luff length above the tack of the sail and is designed to allow the helmsperson to easily see the wind flowing around the leading edge of the sail when sailing upwind and close-hauled. The tell-tales are red and green, so that one can quickly identify the leeward and weather telltales.
- Head and clew areas of the sail are engineered in a radial configuration that improves load distribution for a stronger, smoother corner.
- Two sets of draft stripes for quick sail shape/depth reference.

There are several points to consider:

- We used the outer shroud where it intersects the deck at the aft side of the shroud as our ‘zero’ point in measuring the car location aft along the track. To ensure accuracy we suggest measuring both sides when determining the location of the cars.
- The aft end of the car has a button that is lifted up to disengage the pin that holds the car in place. When moving the car, always move the ‘lazy’ sheet, so that there is no load on the jib sheet or car when making adjustments. Lift the pin and slide the car forward or aft.
- There are evenly spaced holes on the genoa track fore and aft and on 100mm centers. The adjustment pin of the car will lock into these holes.

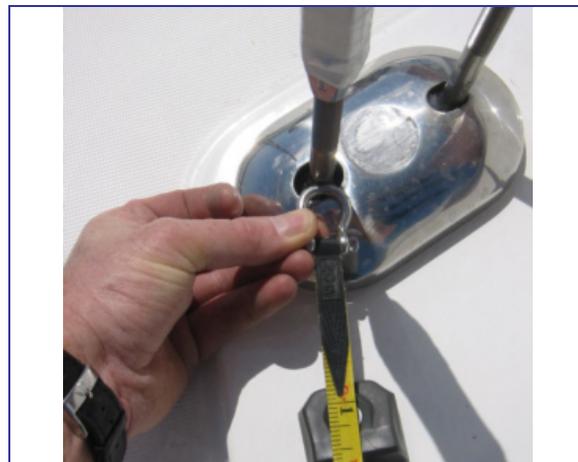

Measuring aft from the shroud base

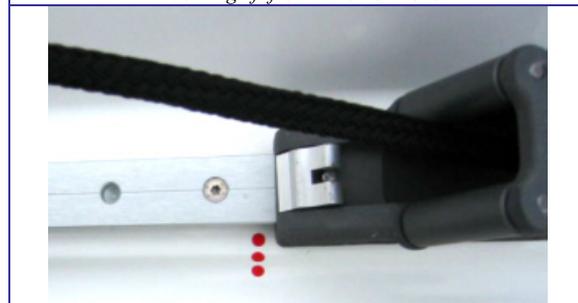

Example of marks located on deck and at front of a genoa car

Why Mark The Lead Position:

You will find that once the initial trim settings are made to the genoa lead (car) position (which is critical to good performance) the cars will not require much movement fore and aft for different conditions. However, as one reefs the headsail smaller and smaller, the sail moves forward and the clew elevates slightly as a result. This changing dynamic requires that we adjust the genoa lead position to ensure proper trim when sailing with this now smaller sail. In marking the location of the cars so that they coincide with the reefing marks at the tack of the genoa you will take the guesswork out of setting the leads when reefing. The lazy genoa car can quickly and easily be moved forward to the pre-marked location and then during a slow tack the genoa is reefed to the coinciding mark at the tack. The sail trim will be properly set on the new tack. When measuring the lead positions (as described below) we suggest that you mark the track at the forward edge of the genoa car. You can do this with permanent marker, tape or some sort of self-adhesive ‘dots’. The marks should be on the deck as track mounted tape/marks can be rubbed off by the car.

MARKING THE LEAD POSTION:

Full Size:

When your genoa is completely unfurled for sailing, the forward edge of the genoa car should be 7'-3-3/4" / 2230mm aft of the outer shroud. This will be your 'all-purpose' lead position.

- This will be appropriate for wind strengths of 7-12 knots true wind.
- Sailing in less than 7 knots of true wind move the lead position forward one hole making the genoa more powerful for these conditions.
- In more than 12 knots of wind, you may move the lead aft one hole (de-powering the sail slightly) or begin to consider reefing the headsail.
- The genoa should be sheeted so that there is sufficient tension on the sail to bring the leech to between 2"-6" / 50-150mm from the tip of the lower spreader and the sail should be between 3"-9" / 75-230mm outside the shroud base.

First Reef Mark:

With the genoa furled to the first 'reefing' mark just aft of the tack of the sail, the lead car should be moved forward until it is 6'-0" / 1830mm aft of the outer shroud.

The leech will be just aft of the spreader as shown below. Note that the sail is equidistance from the spreader and shroud base.

Second Reef Mark:

With the genoa furled to the second and deepest 'reefing' mark, the lead car should be moved forward until it is 5'-1-1/4" / 1530mm aft of the outer shroud.

Conditions that require this third reef will be quite windy and depending on your comfort level may be put in place anywhere from 16 knots on up. This position will keep the foot of the sail quite tight, flattening the shape for good breezy performance.



Leech trim, closed hauled and with full size sail



Track location with full size sail



Car location when reefed to first mark



Sail at the 2nd reef mark and well inside the spreader

Genoa Notes:

Generally, sail trim is a bit of science, a bit of feel and a bit common sense. As a basic rule, we like to say *that if it looks right, it probably is*. Your Neil Pryde sails are designed, tuned, and tested for each specific model and as such, you will be able to achieve proper trim using this guide.

Occasionally, you might find that the leech flutters a bit. If this happens, it's usually that the sheet tension is not tight enough (you need to winch the sail in a bit tighter). However, if the boat becomes over-powered (healing excessively), you should consider reefing the sail at this time. Assuming you have the leads in the right location and the sheet tension is correct, but the sail still has a bit of flutter, you should adjust the leechline to keep the leech from fluttering.

The first photo shows the leechline pocket opened to reveal the leechline, snubbing eyes, cleat and the 'tail' pocket. The snubbing eyes help to take the load from the line making cleating and un-cleating an easy task. The 'tail pocket' is on the inside of the leechline cover and you can put the excess leechline tail into this pocket before closing the cover. To adjust, take up the line by pulling downward just above the eyelets, taking up the slack in the line just below the cleat. Pull the line until the flutter stops. Cleat the line and insert the tail into the pocket and close the flap.



Leechline, cleat and 'tail' pocket

MAINSAIL TRIM:

The following points on mainsail trim apply both to the Furling and Classic mainsail, as the concepts are the same. Mainsail trim falls into two categories, upwind and downwind.

Upwind

1. Upwind in up to about 8 knots true wind the traveler can be brought to weather of centerline. This ensures that the boom will be centerline and the leech of the sail in a powerful upwind mode.
2. Mainsheet tension should be tight enough to have the uppermost tell tail on the leech streaming aft about 50% of the time in the 7-12 true wind range. For those with furling mainsails the action of furling and unfurling the sail can play havoc with keeping the telltales on the sail and you may need to replace them from time to time. You will find that the upper tell tail will stall and fold over to the weather side of the sail about 50% of the time in this condition. However, if it is folding over to leeward, the mainsheet tension is too loose and it needs to be brought in tighter.
3. With the mainsheet tension set, the boom-vang should be tensioned until it is just snug.
4. In over 12 knots, the upper tell tail should be flowing almost all the time.
5. As the wind builds above the 12-knot range you will need to de-power the boat to keep her on her lines and to reduce weather helm. Let the traveler down in 3" increments until the boat balances. If the action of lowering the traveler to balance the helm causes the mainsail to backwind, this means it is time to furl the genoa to the first reefing mark.

Downwind

1. With the boom-vang set as outlined above the mainsail will have close to the right trim for downwind sailing.
2. As soon as the sails are eased and sailing lower downwind angles (even as little as 3⁰) ease the traveler down in 3" increments until the boat balances and drives well.
3. Bearing off 12⁰ and deeper, the traveler should be all the way out and at this point start to ease the mainsheet. The leech tension should correct assuming the boom-vang was tightened as above. At this point all your telltales will be flowing aft.
4. With a battened mainsail (Classic), one normally keeps the top batten parallel to the boom while off the wind. Achieve this with the boom vang keeping the leech adjusted and the telltales flowing aft. Obviously, without the battens (furling mainsails) you will need to eyeball it. If the top batten or sail is falling off to leeward from this position, tighten the vang to bring it back in line with the boom.
With the leech trimmed this way, both tell tails should fly aft 95% of the time.

SAIL CARE:

Both mainsails and headsails will get dirty with time and use. A primary source is air pollution which deposits filth on the standing rigging. The sails in turn will pick this up when they come in contact with shrouds, mast and spreaders. This obviously affects the headsail to a greater degree as it is dragged across the rigging with each tack and gybe. We recommend a yearly cleaning either on your own or through a commercial sail cleaner or sail loft.

Roller Furling Mainsails are equipped with a small label on the starboard clew of the sail. This is designed as a 'marker' that will indicate when the mainsail is furled inside the mast enough so that the U.V. cover on both sides of the sail will protect the sail. It is imperative that the sail be furled so that the label is clearly inside the mast, thus protecting the sailcloth from harmful U.V. which will damage the sailcloth quickly.



*** Special thanks to Chuck Laughlin at St. Barts Yachts for his assistance and use of a 373*